


Testboy® Profi LCD

two-pole voltage tester

Due to its wide performance spectrum, the Testboy Profi LCD is one of the most sought after products in our assortment. The Testboy Profi LCD combines the following five functions in one device:

- Displays DC and AC voltages from 12 to 690V
- Single-pole phase testing
- Two-pole phase sequence testing
- Continuity testing up to 2000Ω
- RCD fault testing

An automatic switch-off function prevents battery drain. However, the Testboy Profi LCD is still able to perform phase test should the batteries be defective or flat.

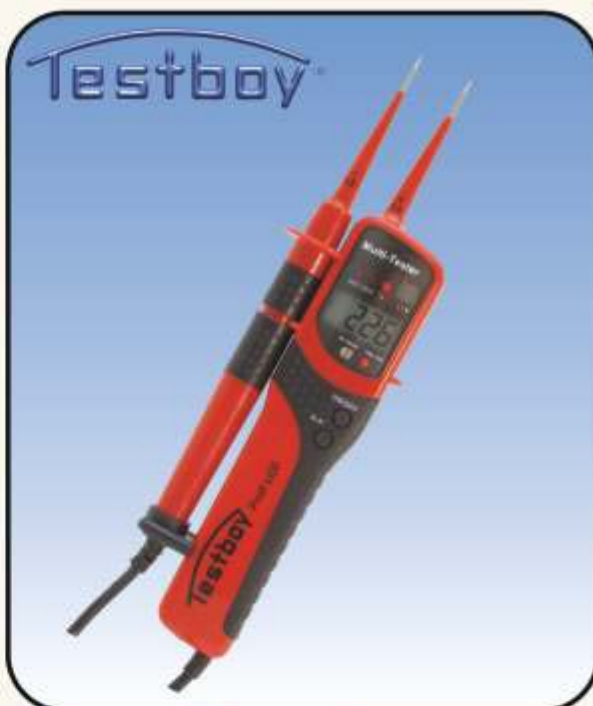

Your advantages: - 3 year manufacturer's guarantee
- TÜV / GS tested and approved
IEC/EN 61243-3, DIN VDE 0628-401

The extremely accurate LC display is particularly professional; service or installation technicians are easily able to display the phase or the phase sequence. To ensure that the protective earth can also be tested, the automatic load function prevents the RCD switch from being triggered.

Even when in daily use, the robust construction as well as the dust and waterproof housing guarantee a long service life. The test tips are protected by a removable cap that in turn is secured to the device.

Technical Details	Testboy Profi LCD
Display	optical, 3½digit LCD, LCD for phase and rotary field 4 LEDs for ACV, DCV, and Data-Hold
Operating Panel	finger tip ON/OFF button, D-H button
Measurement Range	automatic range 12 to 690V AC/DC, 0 to 400Hz 0 to 2000Ω
Continuity Test	0 ~ 35Ω with acoustical signal
Phase Indication	> 100V AC
Automatic Resistance	I _s ~ 30mA ED(DT) = 30sec.
Power Supply	2 x 1,5V
Overload Category	CAT IV 1000 V
Dimension	238 x 70 x 30 mm
Protection	IP 65
Weight	200g
TÜV / GS	IEC/EN 61243 - 3
Colour	red - black, other colours on request
Scope of Delivery	1x operating instructions 2x battery type AAA LR03
Supplies, Optional	readiness bag

Rights reserved to change specifications without prior notice. State June 2005.